




***QB Series***  
***Balanced pusher seals***

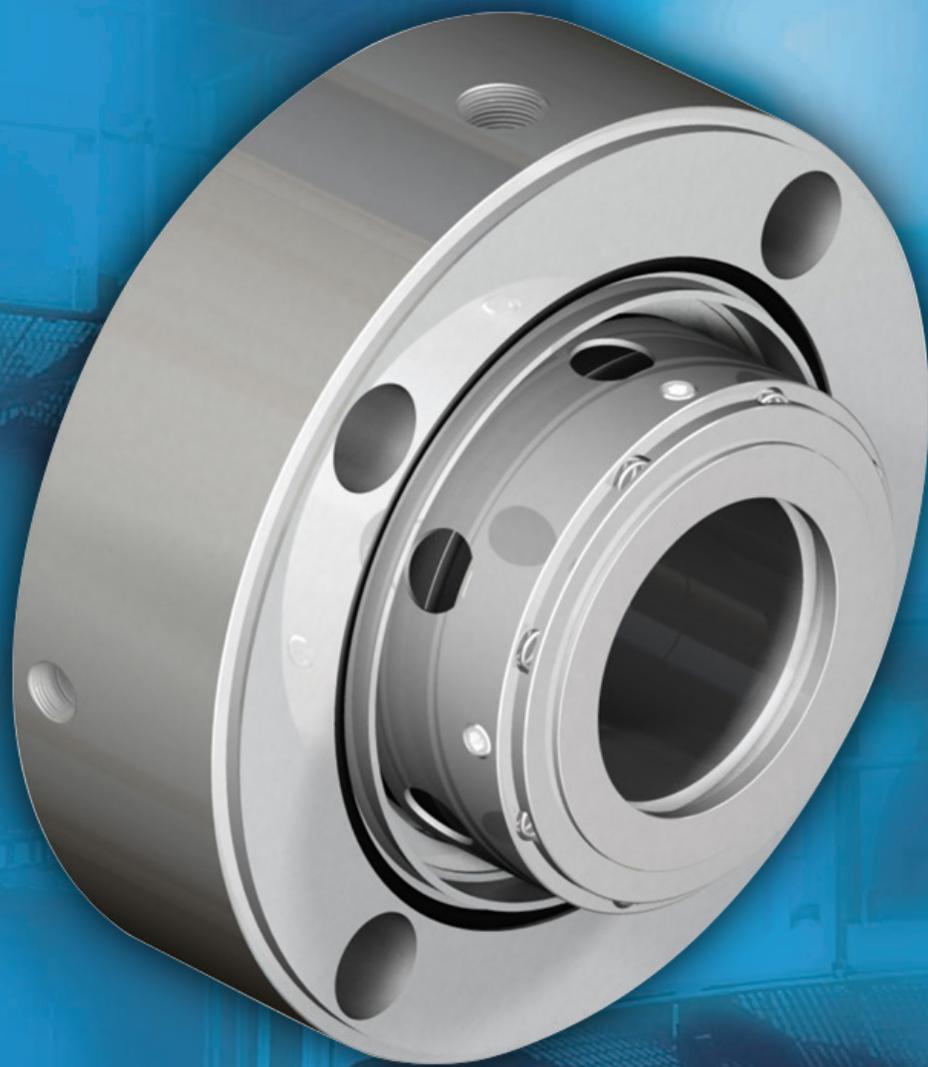

***Experience In Motion***

*QB Series seals are balanced pusher seals available in single and dual seal configurations used for sealing environmentally-restricted products and meeting the most stringent regulations. The QB Series is fully compliant with API 682 Type A requirements.*

### **Seal faces optimized for the application**

Flowserve Precision Face Topography Hydropads, Lube Grooves, Waves and Diamond Coatings reduce seal face heat generation and wear in low lubricity, flashing fluid applications.



## **Workhorse of the hydrocarbon processing industry**

The QB Series is differentiated by its wide range of standardized feature packages and comprehensive custom options library. From hot water to light hydrocarbons, the QB Series core platform is easily configured to cover the vast majority of a plant's low and moderate duty services. QB Series seals compliment API 610 pumps by installing as a unitized cartridge without requiring pump modifications in almost all cases.

### **Advanced spring holder design**



Rotating spring holder with radial openings at both ends of the springs uses centrifugal force to create circulation through the springs. This feature keeps springs clean and properly functioning to accommodate for shaft axial movement and thermal growth.

### **Standardized feature packages simplify seal selection process**

The QB Series includes several feature packages for seals which operate directly on the process fluid. Package selection is largely determined by the process fluid's state at process temperature and atmospheric pressure. Under these conditions, fluids that remain liquid are considered non-flashing and fluids that exist as a gas or vapor are considered flashing.

### **API 682 Arrangements 1 & 2**

Single QB Series seals and the inner seal of dual unpressurized seals operate directly on the process fluid and must be selected based on the type of fluid being pumped.

- QB** Seal face balance optimized for non-flashing water, hydrocarbon, acids, and amines
- QBU** Features Flowserve Precision Face Topography, Lube Grooves, for use on flashing water application such as boiler feed water
- QBQ** Seal face balance optimized for flashing hydrocarbons; capable of emissions levels less than 500 ppm
- QBQ LZ** Features Flowserve Precision Face Topography, Waves, for use on flashing hydrocarbon applications where the seal chamber pressure is at or near the fluid's vapor pressure
- QBS** Replaces multiple coil springs with a large single coil spring to provide the highest resistance to clogging in dirty services

### **API 682 Arrangement 3**

Dual seals with pressurized barrier fluid are unique in that during upset conditions, the pressure acting on the seal can reverse directions. To handle these upsets, the QB Series includes double balanced seal face technology to handle pressure from either the process or barrier fluid side of the seal faces.

- QBB** Double balanced seal face optimized for face-to-back configured Arrangement 3 seals
- QB2B** Double balanced seal face optimized for back-to-back configured Arrangement 3 seals

**Barrier fluid circulation extends seal reliability**

To keep seal faces cool and properly lubricated, integrated axial and radial flow circulating devices are available for single seals with Plan 23 or dual seals to move fluid from the seal to the seal cooler or reservoir.

**Handle upset conditions**

Fully retained parts and double balanced inner seals enable dual QB Series seals to survive seal chamber over-pressurization or loss of barrier fluid pressure.

**Reliability-enhancing features from the custom options library meet specific customer needs**

The QB Series can be configured with a number of additional features including:

- Isolating seal chamber throat bushings
- Wear resistant overlays for metal parts
- Secondary containment devices
- High pressure sleeve drive collars
- Thermal isolation devices and cooling jackets

**Part interchangeability between single and dual seal arrangements**

Minimizes inventory requirements and maximizes design flexibility.


**Multiport flush design improves heat dissipation for uniform face cooling**



A distribution ring connected to the seal's flush port and located co-axially with the sealing interface improves the cooling efficiency of Piping Plan 11, 14, 21, 31, and 32 by injecting the flush flow 360° around the seal faces.

**Withstand torque with solid seal face drive keys**

Solid drive keys efficiently transmit torque loads from the seal face without deforming. The large radius on the drive key couples with a similar radius on the seal face providing full-length engagement to prevent edge chipping.

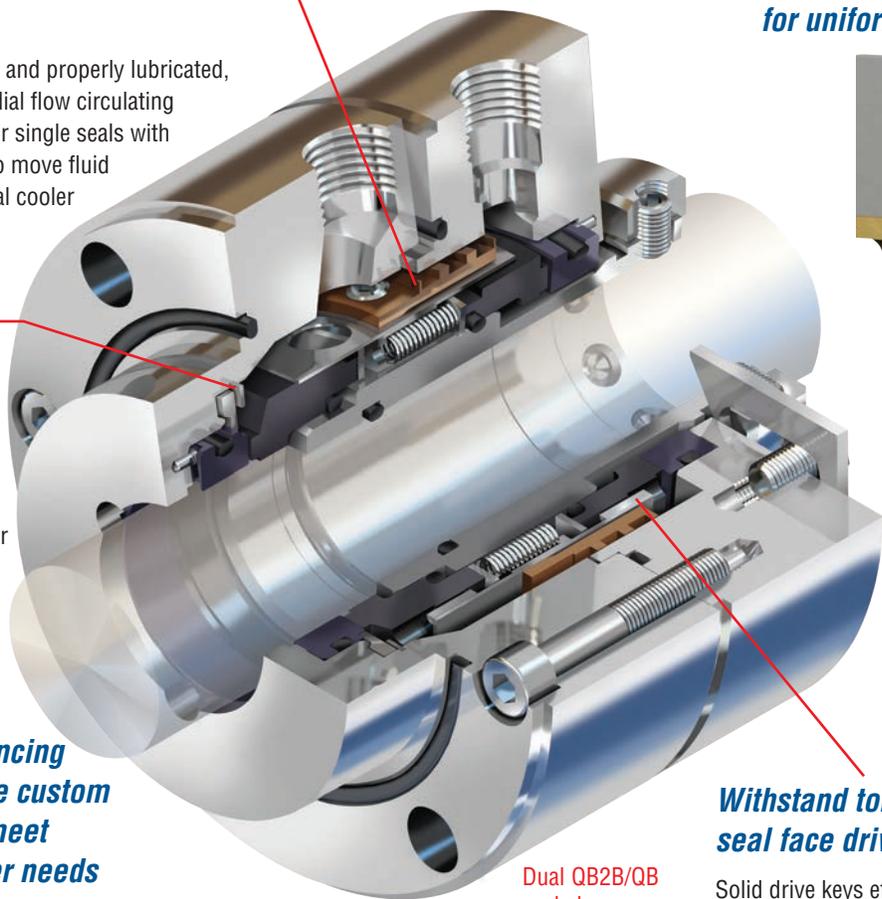

Dual QB2B/QB seal shown

**Operating Parameters**


<b>Pressure</b>	up to 51.7 bar (750 psi)
<b>Temperature</b>	-40 to 204°C (400°F)
<b>Speed</b>	up to 23 m/s (75 fps)
<b>Shaft Sizes</b>	12.7 to 139.7 mm (0.500 to 5.500 inch)

**Materials of Construction**


<b>Metal Components</b>	316 Stainless Steel, Alloy C-276, Alloy 20
<b>Rotating Face</b>	Carbon, Silicon Carbide, Diamond Coating
<b>Stationary Face</b>	Silicon Carbide, Tungsten Carbide, Diamond Coating
<b>Gaskets</b>	Fluoroelastomer, Perfluoroelastomer
<b>Springs</b>	Alloy C-276




Arrangement 1 QB single seal with fixed throttle bushing for secondary containment

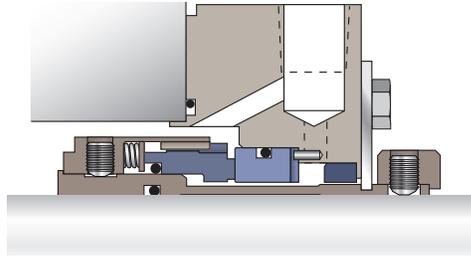

Arrangement 2 QBQ/QBQ unpressurized dual seal with liquid buffer fluid provides near-zero emissions sealing

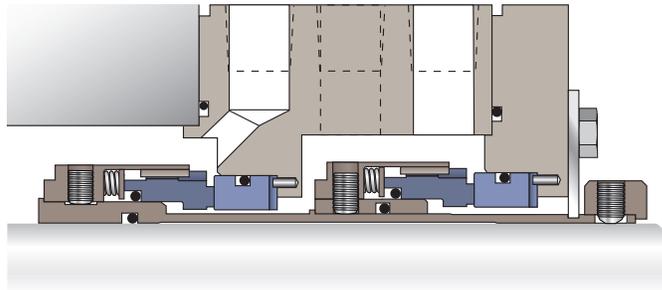

Arrangement 3 QB2B/QB back-to-back pressurized dual seal with barrier fluid provides zero emissions sealing

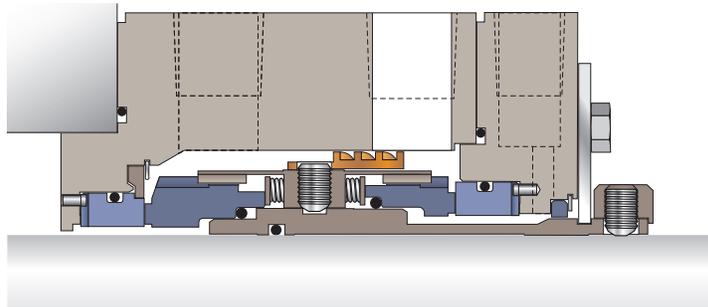

FSD152eng REV 05-16 Printed in USA

**To find your local Flowserve representative**  
and find out more about Flowserve Corporation,  
visit [www.flowserve.com](http://www.flowserve.com)

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2016 Flowserve Corporation

### USA and Canada

Kalamazoo, Michigan USA  
Telephone: 1 269 381 2650  
Telefax: 1 269 382 8726

### Europe, Middle East, Africa

Roosendaal, The Netherlands  
Telephone: 31 165 581400  
Telefax: 31 165 554590

### Asia Pacific

Singapore  
Telephone: 65 6544 6800  
Telefax: 65 6214 0541

### Latin America

Mexico City  
Telephone: 52 55 5567 7170  
Telefax: 52 55 5567 4224